

TA26.2P

caratteristiche/features


ø 26



M20



1-1



2500

peso/weight

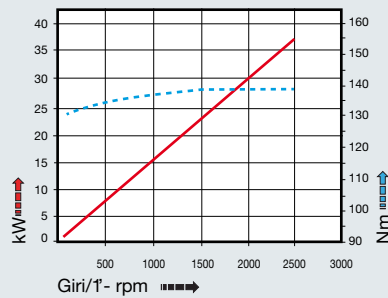

22,5 kg

rotazione/rotation


input



output

prestazioni/performance


CONO SHANK	size	A	B	H	
				standard	optional
DIN9871 *	-			-	-
	45			110	-
	50	192	35		
ANSIB5.50 *	-			-	-
	50			110	-
BT *	-			-	-
	50	200	45	110	-
HSK	-			-	-
DIN9893	80	201	46	110	-
	100				
CAPTO	-			-	-
ISO26623	-	196		110	-
	C8				
KM	-			-	-
	-	192		110	-
	100				
DIN2080	-			-	-
	-			-	-
	-	165	16	110	-
	50				
NMTB	-			-	-
ANSIB5.18	-			-	-
	50	165	16	110	-

tipi mandrino disponibili / available spindle types

2

Albero portafrese
Milling shaft

3

Weldon
Whistle-Notch

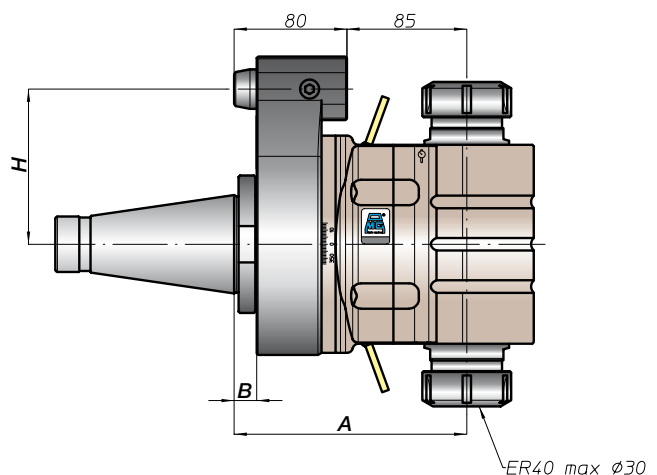
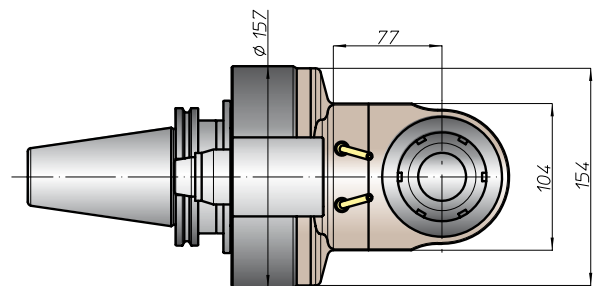
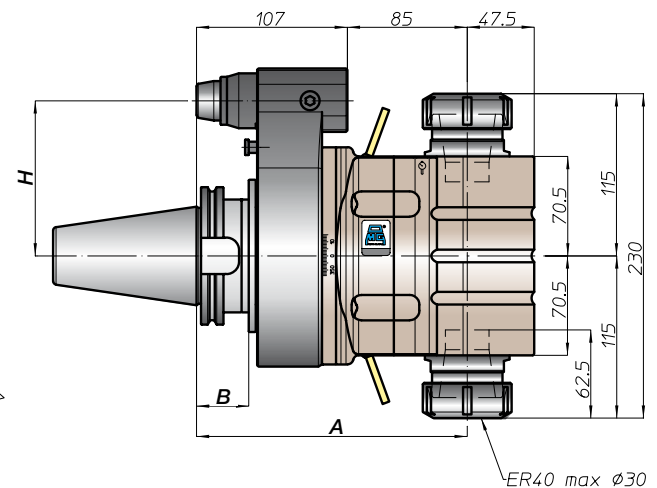
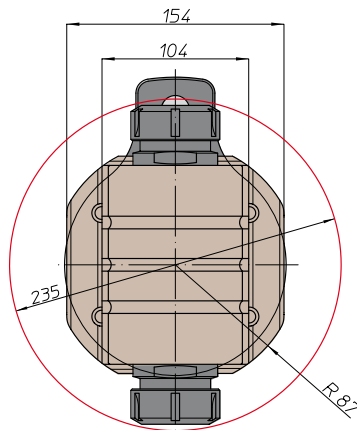
6

ABS
Licenza KOMET®

Ø16-Ø27-Ø32

Ø32

ABS50



* Option: Dual Contact

BAH

TA.CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

3-37