



# TAV20.P

## caratteristiche/features



Ø 20



M16



1-1



2500

peso/weight



22 kg

rotazione/rotation




input



output

```
prestazioni/performances
```

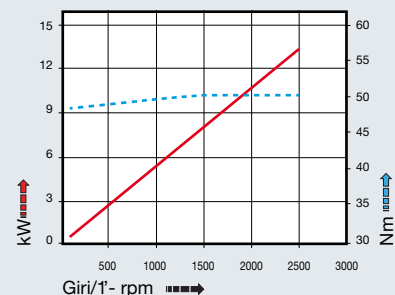tipi mandrino disponibili / *available spindle types*



**1** DIN6388-ER  
**ER40**

**2** Albero portafrese  
Milling shaft  
**Ø32**

**3** Weldon Whistle-Notch  
**Ø20-Ø25**

**4** DIN69893-HSK  
**HSK50**

**6** ABS  
Licenza KOMET®  
**ABS50**

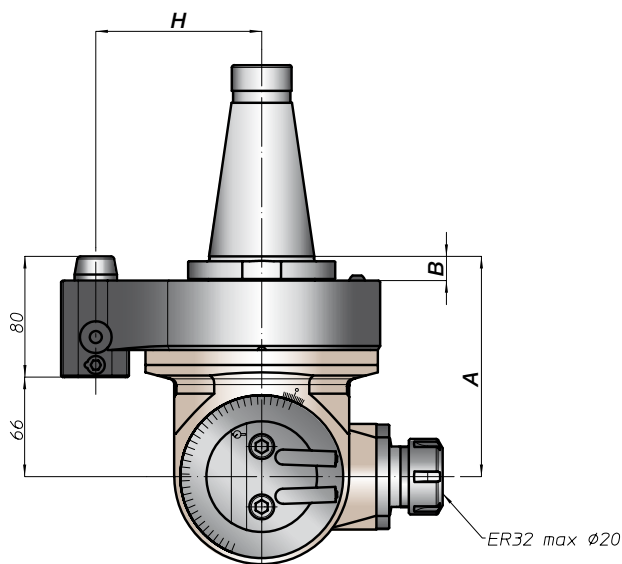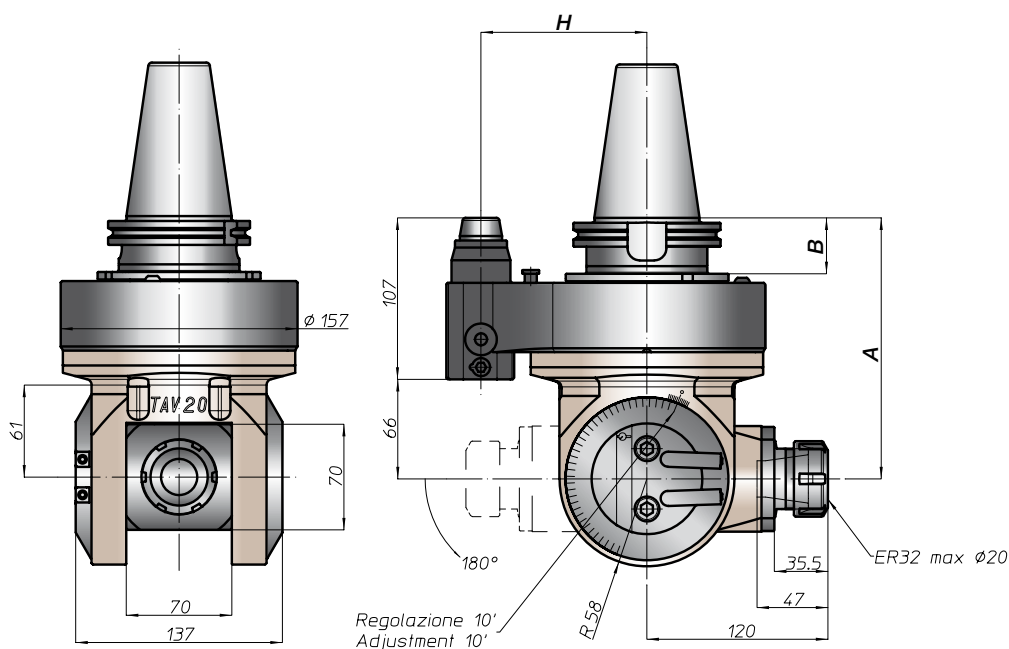

| CONO SHANK                                                                                                    |     | size | A   | B   | H        |          |
|---------------------------------------------------------------------------------------------------------------|-----|------|-----|-----|----------|----------|
|                                                                                                               |     |      |     |     | standard | optional |
| ★<br><br>DIN 69871         | -   | 173  | 35  | -   | -        |          |
|                                                                                                               | -   |      |     | -   | -        |          |
|                                                                                                               | -   |      |     | 110 | -        |          |
|                                                                                                               | 50  |      |     | -   | -        |          |
| ★ CAT<br><br>ANSI B5.50  | -   | -    | -   | -   | -        |          |
|                                                                                                               | 50  | 110  | -   |     |          |          |
| ★<br><br>BT              | -   | -    | -   | -   | -        |          |
|                                                                                                               | 50  | 181  | 45  | 110 | -        |          |
| HSK<br><br>DIN 69893     | -   | 182  | -   | -   | -        |          |
|                                                                                                               | 80  |      | 46  | 110 | -        |          |
|                                                                                                               | 100 |      | -   | -   | -        |          |
| CAPTO<br><br>ISO 26623   | -   | 177  | -   | -   | -        |          |
|                                                                                                               | -   |      | 110 | -   |          |          |
|                                                                                                               | C8  |      | -   | -   |          |          |
| KM<br><br>KM             | -   | 173  | -   | -   | -        |          |
|                                                                                                               | -   |      | 110 | -   |          |          |
|                                                                                                               | 100 |      | -   | -   |          |          |
| DIN 2080<br><br>DIN 2080 | -   | -    | -   | -   | -        |          |
|                                                                                                               | -   | -    | -   | -   | -        |          |
|                                                                                                               | -   | 149  | 16  | 110 | -        |          |
|                                                                                                               | 50  | -    | -   | -   | -        |          |
| NMTB<br><br>ANSI B5.18   | -   | -    | -   | -   | -        |          |
|                                                                                                               | 50  | 149  | 16  | 110 | -        |          |

\* Option: Dual Contact

