

TAV13.PD

caratteristiche/features




peso/weight




rotazione/rotation



prestazioni/performance

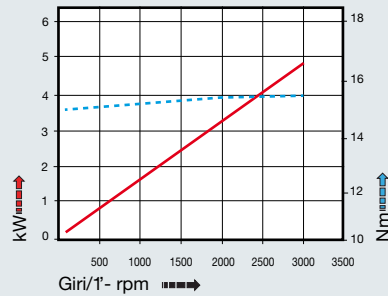

tipi mandrino disponibili / available spindle types



CONO SHANK	size	A	B	H	
				standard	optional
* DIN69871 *	-			65	-
	40				
	45			80	110
	50	150	35		
* CAT ANSIB5.50	40			65	-
	50			80	110
* BT	40			65	
	50	158	45	80	110
DIN69893 HSK	63		42	65	
	80	159			
	100		46	80	110
CAPTO ISO26623	C5			65	
	C6	154	39		
	C8			80	110
KM	63			65	
	80	150			
	100			80	110
DIN2080	-	120	13	65	-
	40				
	-	-	-	-	-
ANSIB5.18 NMTB	-	-	-	-	-
	-	-	-	-	-

