

TAV30.P



caratteristiche/features



ø 30



M24



1-1



2500

peso/weight



42 kg

rotazione/rotation




input



output

prestazioni/performances

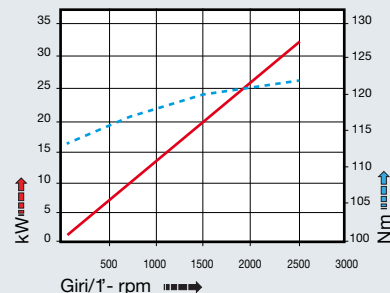



tipi mandrino disponibili / available spindle types

1 DIN6388-ER
ER50

2 Albero portafresa
Milling shaft
Ø32-Ø40

4 DIN69893-HSK
HSK63

6 ABS
Licenza KOMET®
ABS63

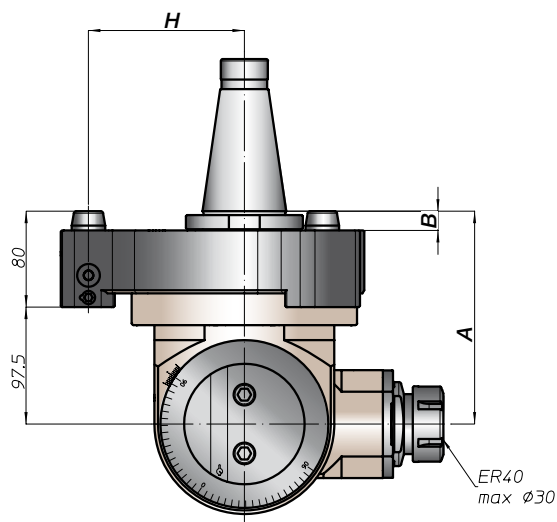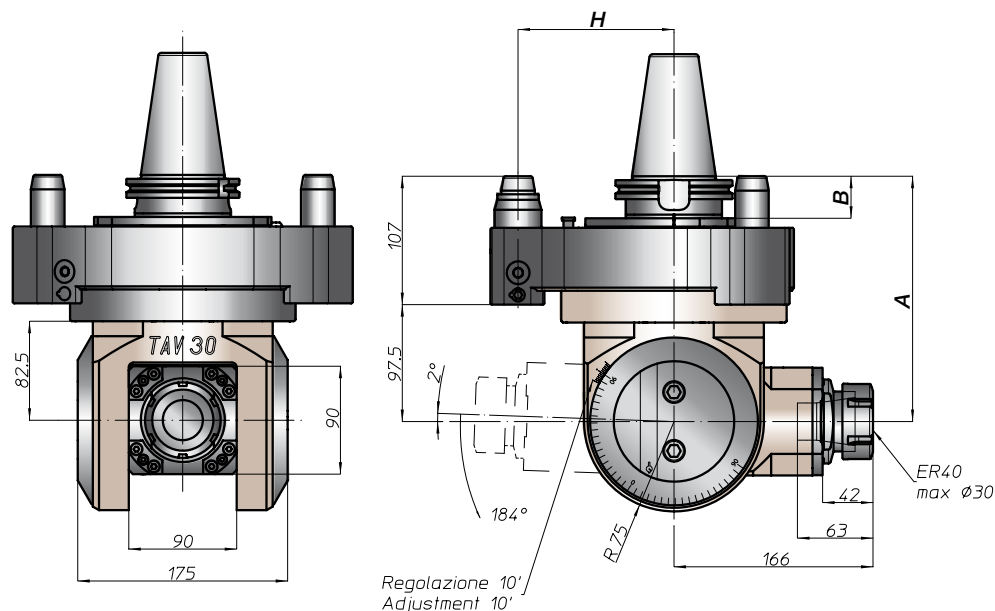

CONO SHANK	size	H			
		A	B	standard	optional
* DIN69871	-	204,5	35	-	-
	-			-	-
	50			130	-
* CAT ANSIB5.50	-	213,5	46	-	-
	50			130	-
* BT	-	212,5	45	-	-
	50			130	-
HSK DIN69893	-	213,5	42	-	-
	-			-	-
	100			130	-
CAPTO ISO26623	-	208,5	-	-	-
	-			-	-
	C8			130	-
KM	-	204,5	-	-	-
	-			-	-
	100			130	-
DIN2080	-	177,5	16	-	-
	-			-	-
	50			130	-
ANSIB5.18 NMTB	-	177,5	16	-	-
	50			130	-

* Option: Dual Contact