

TAV20.PD

caratteristiche/features




peso/weight



rotazione/rotation



prestazioni/performance

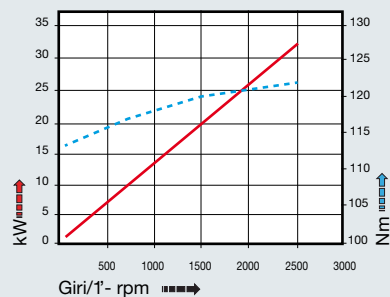

CONO SHANK	size	A	B	H	standard	optional
DIN69871 *	-	-	-	-	-	-
	50	173	35	110	-	-
ANSIB5.50 CAT	-	-	-	-	-	-
	50	-	-	110	-	-
BT	-	-	-	-	-	-
	50	181	45	110	-	-
HSK	-	-	-	-	-	-
	80	182	-	-	-	-
	100	-	46	110	-	-
CAPTO	-	-	-	-	-	-
	-	177	-	-	-	-
	C8	-	-	110	-	-
KM	-	-	-	-	-	-
	-	173	-	-	-	-
	100	-	-	110	-	-
DIN2080	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
NMTB	-	-	-	-	-	-
	-	-	-	-	-	-

tipi mandrino disponibili / available spindle types

1 DIN6388-ER	3 Weldon Whistle-Notch	4 DIN69893-HSK	6 ABS Licenza KOMET®
ER40	Ø20-Ø25	HSK50	ABS50

