

TAO20.PD

caratteristiche/features



peso/weight



14,5 kg

rotazione/rotation




input



output


prestazioni/performance

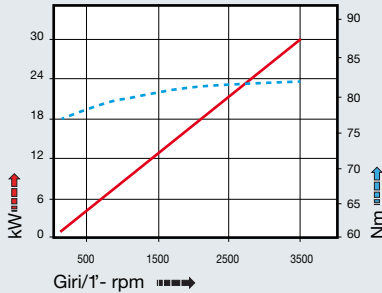

tipi mandrino disponibili / available spindle types

- 2** Albero portafrese
Milling shaft
Ø22-Ø27-Ø32
- 3** Weldon
Whistle-Notch
Ø16-Ø20
- 4** DIN69893-HSK
HSK50

CONO SHANK	size	A	B	H	
				standard	optional
* DIN69871	-			-	-
	45			80	110
	50	230	35	80	110
* CAT	-			-	-
	50			80	110
* BT	-			65	
	50	238	45	80	110
HSK DIN69893	-		42	-	
	80	239	46	80	110
	100				
CAPTO ISO26623	-	234		-	
	-			80	110
	C8				
KM	-	230		-	
	80			80	110
	100				
DIN2080	-			-	-
	-			-	-
	-			-	-
NMTB ANSIB5.18	-			-	-
	-			-	-

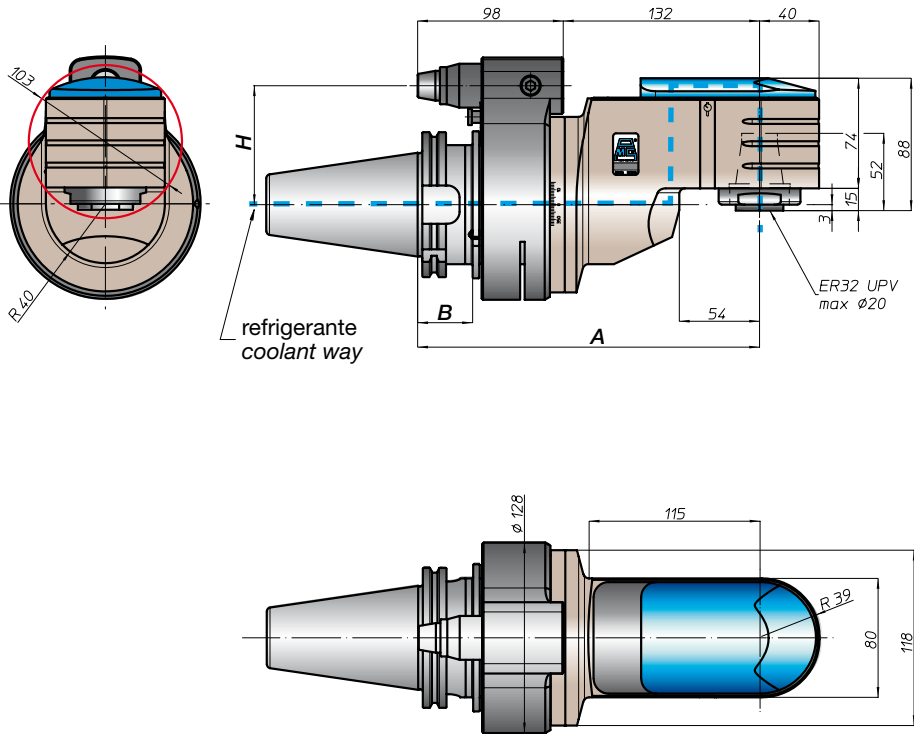

* Option: Dual Contact



BAH

TA.CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

3-55